



PEDESTAL – INTERACTIVE VOICE COMMUNICATION UNIT

The **CB 3** combines Code Blue's versatile speakerphone system with a low voltage combination blue beacon/strobe and our standard 8 inch diameter bollard. The rugged six-sided cast aluminum light cage is securely mounted to the bollard top and the clear polycarbonate lens encloses the housing and protects the blue beacon/strobe. This design provides high visibility throughout the entire 360-degree area. The standard long lasting LED lighted faceplate simplifies operation. Standard operating voltage is 24v AC and step down transformers are available to handle other voltages.

The exclusive analog InterAct™ and VoIP speakerphones are designed for maximum reliability, vandal resistance, auxiliary functions, mass notification control, and fault monitoring and reporting capability; leading the market in system programming flexibility.

The **CB 3** is an excellent choice for cities and municipalities, parks, college and commercial campus areas, open environments and wherever ornamental décor as well as dependable operation is required.

STANDARD FEATURES

- ▶ Analog and VoIP speakerphone options
- ▶ ToolVox® Communication Manager compatible with Blue Alert®, EMS and UPD software integration
- ▶ 2 Auxiliary inputs/3 Auxiliary outputs (3 NO or 3 NC)
- ▶ High output combo LED beacon/strobe
- ▶ LED lit stainless steel faceplate
- ▶ 24v AC power
- ▶ Voice Identifier
- ▶ ADA compliant
- ▶ UV resistant lenses
- ▶ Vandal resistant hardware
- ▶ Phone line surge suppressor
- ▶ Ultra-weather resistant finish
- ▶ Internal foundation anchor kit

OPTIONAL FEATURES

- ▶ Two-button speakerphone w/keypad
- ▶ Two-button speakerphone
- ▶ Custom colors & graphics
- ▶ Step-down power transformer

UNIT SPECIFICATIONS

Overall Height	144.5" (367 cm)
Outside Diameter (bollard)	12.75" (32.4 cm)
Outside Diameter (light housing)	21.5" (54.6 cm)
Housing Material, steel & cast aluminum (light housing)	.25" (.635 cm)
Access Opening (w x h)	4.75" x 8" (12.1 x 20.32 cm)
Overall Weight	260 lbs. (118 kg)
Standard Power Requirements	24v AC @ 15w

UNIT FINISH COLORS


Standard Painted Finish	British Racing Green, Cardinal Red, Dark Bronze, Gloss White, Gloss Black, Medium Bronze, Midnight Blue, Safety Blue, Safety Red, Safety Yellow
Custom Painted Finish	Custom colors from Pantone® color chart or sample are available as a special order

GRAPHICS TEXT (WORDING)


Standard	Assistance, Courtesy, Emergency, Police, Security
Custom	Custom text graphics are available as a special order

GRAPHICS TEXT COLORS


Standard (reflective decal)	Black, Blue, Green, Red, White, Yellow
Custom	Custom colors from Pantone color chart or sample are available as a special order

FACEPLATE OPTIONS
FP1


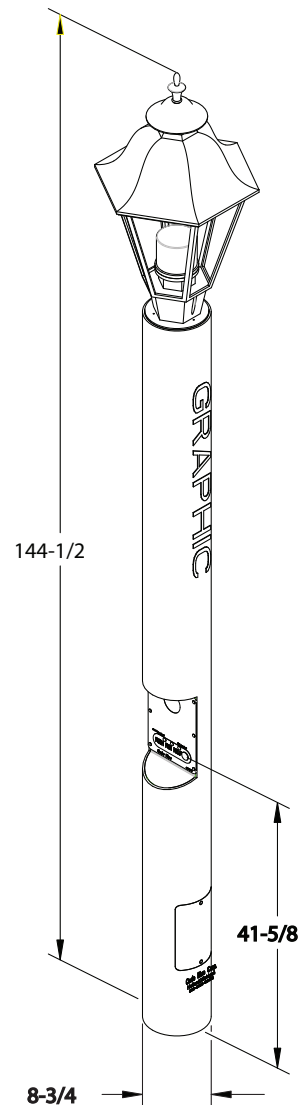
Standard faceplate assembly with single red **PUSH FOR HELP** button

FP2


Optional faceplate assembly with additional black **INFO** button

FP2-K


Optional faceplate assembly with additional **CALL** button and keypad



- Mounting hardware and template for unit is shipped in advanced for foundation work.
- Specifications subject to change without notice or obligation on the part of the manufacturer.